



D-NET™ 9575 AA

3D ARM IMPACT SPRINKLER WITH ADJUSTABLE ARC



APPLICATIONS

For open filed crops edge irrigation.

BENEFITS AND FEATURES

Road guard

- A simple adjustable arc enables to change the sprinkler from 360 degrees arc to any part circle.

Higher and better yields

- The D-Net™ 9575 AA provides outstanding water distribution uniformity, due to the unique 3-D arm enabling, the highest uniformity in the market, respective to its flow rate and installation spacing.
- The D-Net™ 9575 AA provides maximum water-use efficiency

Saves labor costs and multiple expenses on maintenance

- High robustness
The D-Net™ 9575 AA has special design that makes the sprinkler more resistant and ensures high performance for a long product life.
- Extended product life
The D-Net™ 9575 AA is made of UV-protected materials, making it durable under all climate conditions and with any applied nutrients.
- Flexible installation
Can be installed on solid sets or on removable field stands.
- Easy to maintain
A special nozzle key is designed to allow simple cleaning of the nozzle even under pressure.

SPECIFICATIONS

- 2 different nominal flow rates: 850, 1030 l/h.
Nominal flow rates at 3.0 bar pressure.
- Recommended working pressure: 2.5 to 4.0 bar (at the sprinkler head).
- Wherever sand exceeding 2 ppm exists in the water, a Hydrocyclone is to be installed to protect the system.
When sand/ silt/ clay solids exceed 100 ppm, pretreatment will be applied according to Netafim™ expert team's instructions.
- Water trajectory: 24 degrees
- Inlet connection: 3/4" male threaded.
- Color coded nozzles for easy identification.

D-NET™ 9575 AA - PERFORMANCE TABLE

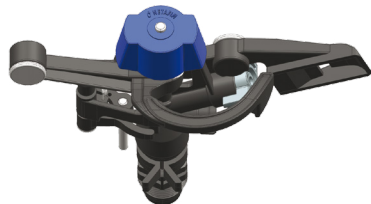
NOZZLE SIZE (MM)	CODE COLOR	WORKING PRESSURE (BAR)	FLOW RATE (L/H)	WETTED RADIUS* (M)
Front nozzle 3.57	Blue	2.5	776	11.5
		3.0	850	12.0
		3.5	918	12.0
		4.0	982	12.5
Front nozzle 3.96	Green	2.5	940	12.0
		3.0	1030	12.5
		3.5	1112	12.5
		4.0	1189	13.0

* At least 0.5 mm/h

PACKAGING DATA




MODEL	QUANTITY P/BOX UNIT	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
D-Net™ 9575 AA	40	54 x 20 x 48	9.4	20	800	190

D-NET™ 9575 AA CATALOG NUMBERS

NOZZLE SIZE (MM)	NOZZLE CODE COLOR	FLOW RATE (L/H) *	CATALOG NUMBER	SPRINKLER ILLUSTRATION
3.57	Blue	850	60100-002190	
3.96	Green	1030	60100-002191	

*Nominal flow rate at 3.0 bar working pressure

D-NET™ 9575 AA SPRINKLER NOZZLES

NOZZLE SIZE (MM)	CODE COLOR	CATALOG NUMBER	PRODUCT DRAW
Front nozzle 3.57	Blue	60100-002100	
Front nozzle 3.96	Green	60100-002101	
Plugged nozzle	Black	60100-001400	

COMPLEMENTARY PRODUCTS

PRODUCT DESCRIPTION	CATALOG NUMBER	CONNECTOR ILLUSTRATIONS	PRODUCT DESCRIPTION	CATALOG NUMBER	CONNECTOR ILLUSTRATIONS
Socket 3/4" F TH 3/4" F TH	65080-004700		D-Net™ 9575 AA Nozzle Tool	1 unit 60100-003600	
Reducer Coupling 1" F TH - 3/4" F TH	60101-000500			150 units/box 60100-003610	